


CLEANING MACHINE

FC-S750 SERIES

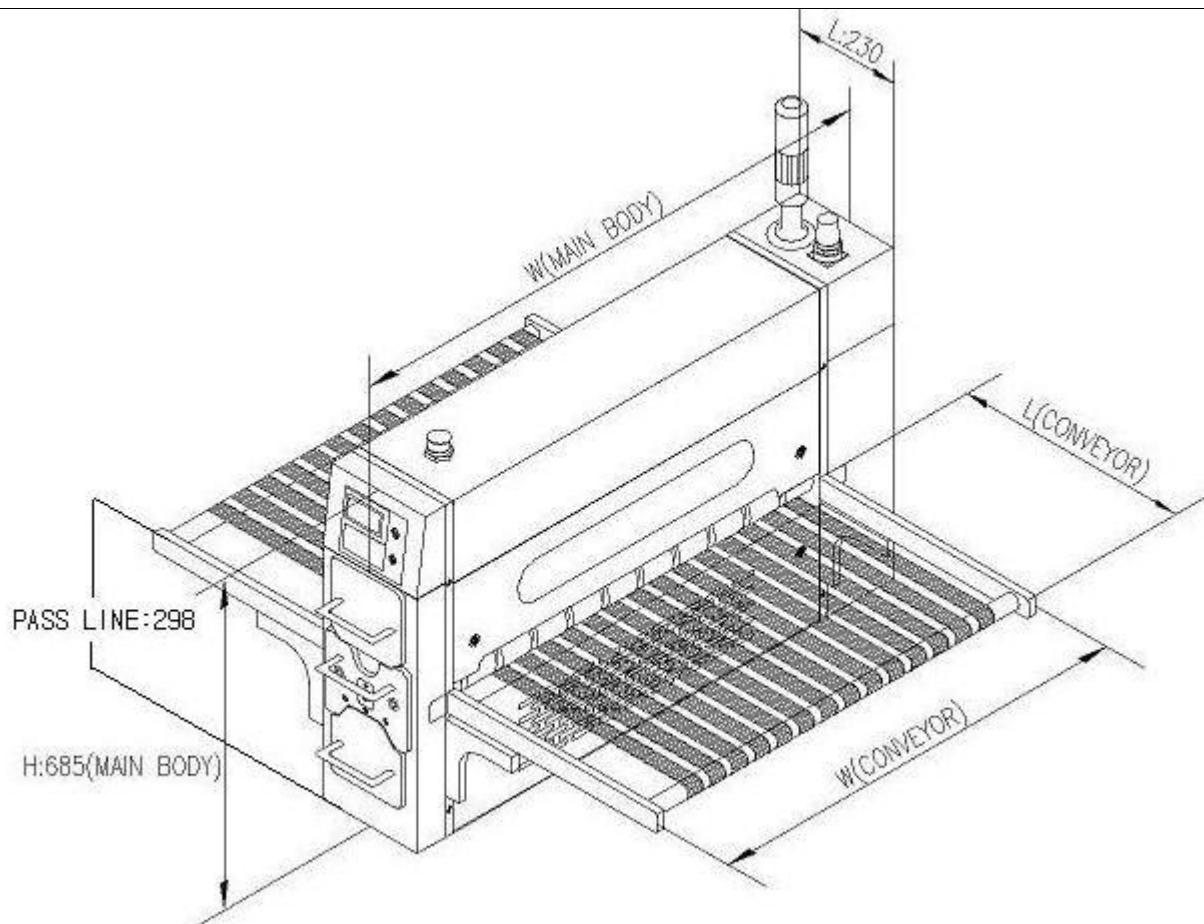

STANDARD FEATURES

- Double side cleaning(2 upper and 2 lower cleaning roller, Cleaning roller size Ø50)
- Two bar type ionizers inside of the machine
- Digital operating panel
- Supports multi-language(Korean, English, Chinese, Japanese, Deutsch)
- In-Line, Repeat, Auto Stop function
- Built-in counter function
- Adhesive roll replacement cycle setting function
- **Cleaning roller and adhesive roll drawer type**
- **Gap control device**

MAIN BODY DIMENSION (mm)	SERIES	W	L	H	CONVEYOR DIMENSION (mm)	SERIES	W	L	H
	650	1080	230	685		650	835	510	50
	850	1280	230	685		850	1035	750	50
	1300	1730	230	685		1300	1485	1000	50
APPLICABLE MATERIAL	SERIES	W	L	T	PASS LINE			298mm	
	650	630	460	0.1~5	METHOD OF DEIONIZATION			CORONA DISCHARGE	
	850	830	700	0.1~5	SPEED CONTROL			Max. 50M/min	
	1300	1280	950	0.1~5	AIR SUPPLY			4~5kgf/cm ²	
ELECTRIC POWER					100/220Vac 50Hz/60Hz				

OPTION

CONVEYOR



ROUND



FLAT



ROLL



SPECIAL ROLL



SLIP ROLL+O-RING

WORKING TABLE



FOOT



CASTER




CASTER&FOOT



FOOT MASTER

OTHER

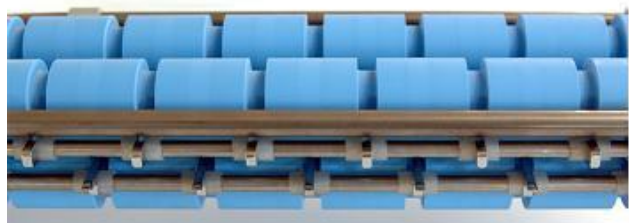

- **AL-GUIDE(ANTI-CURLING GUIDE)**
Prevents thin films from being folded or curled



SUS CASE

- Chemical and corrosion resisted case that is made from SUS



EXTERNAL COUNTER

- Counting function
- Range: 0~9999



ADDITIONAL BAR TYPE IONIZER AT OUTPUT CONVEYOR